

ตู้ควบคุมอุณหภูมิ 0-40°C Laboratory Incubator



Accuplus i250S

Temperature Control

- Microprocessor Controller
- Forced-air circulation system ensuring constant cabinet temperature
- Temperature setting range can be selected by user from 0-40 °C

Ergonomic Design

- Multilevel adjustable shelves
- 2 lines LCD display for easy observation
- R290 refrigerant
- Inner light
- 4 castors easy to move

Alarm and safety function

- Audible and visible alarms
- Upper/Lower alarm
- Power failure alarm
- Status light for showing the status of working state, stand by, fault


ACCU+

តួគ្រប់គ្រងគុណភាព **0-40°C** **Laboratory Incubator**

High Quality Incubator

Technical Data

Accuplus i250S **Specification**

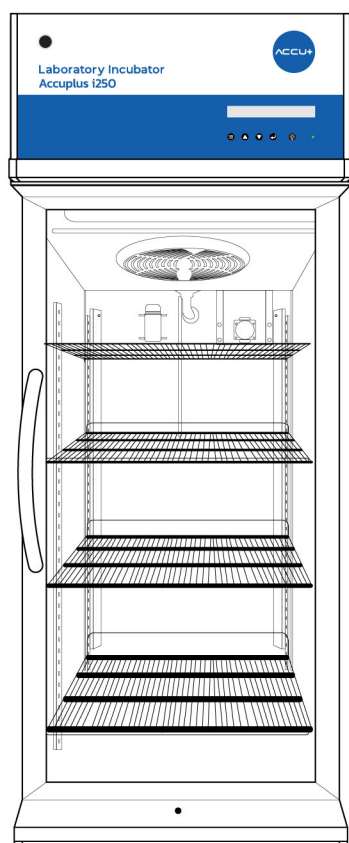

Capacity	270 Liters (9 Cu.ft)
Temperature Control	Microprocessor Controller
Temperature Range	0 - 40°C with 0.1°C Resolution
Temperature Stability	± 1.0°C
Display	LCD Display 2 lines
External Material	Powder coated metal
Internal Material	Powder coated metal
Alarm	Audible and visible alarms Upper / Lower alarms
Door Type	2 layer glass doors
Inner Light	LED x 1 set
Power plug	One built-in power socket inside
Shelves	4 adjustable shelves
Defrost System	No frost (no ice build-up)
Security system	Equipped with emergency high/low temperature cut-off for safety (0°C and 50°C limits) ELCB (Earth leakage circuit breaker) system
Program	Pre-programmed automatic temperature control at 4, 20, 25, and 37°C
Legs / Caster Wheel	Equipped with 4 castors with 2 stoppers
Refrigerant	R290
Dimension (W x D x H)	Internal : 495 x 505 x 1100 mm. External : 600 x 680 x 1760 mm. 220-240 V / 50 Hz.
warranty	1 year